

**Pendant
Instruction
guide.**

Solid.

**Terence
Woodgate**

Thank you for choosing this light from the Solid collection by Terence Woodgate.


The name Solid refers to both the solid natural materials the body is made from and the solid state light source it uses.

Included in this box is a state-of-the-art Megaman LED lamp.

LEDs are incredibly efficient and the Solid collection was designed to maximise their energy-saving benefits.

As this product is made from natural materials, each piece is unique.

For more information about us, and about LED technology, visit our website at terencewoodgate.com

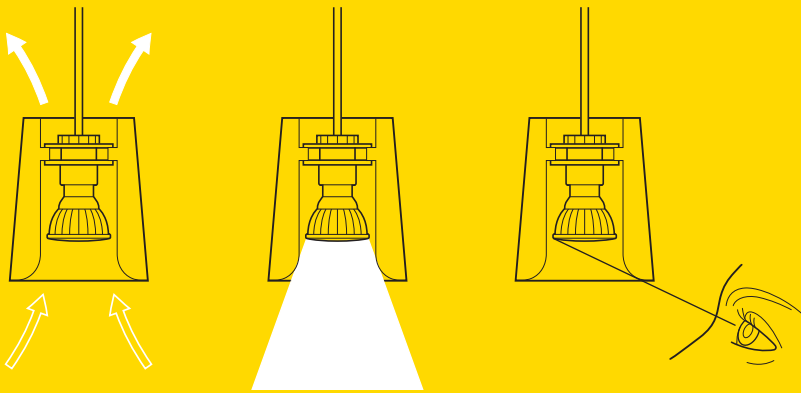

Cooling air flow for maximum life and efficiency

Direct even beam

Low glare

Solid.


Benefits.

Please read the entire instructions. Switch off power before installation. We recommend that installation be performed by a qualified electrician.

Installation and operation are subject to local regulations.

⊕ Class 1 product. Must be earthed.

Securely fix ceiling bracket using appropriate fixings and expansion plugs for ceiling material.


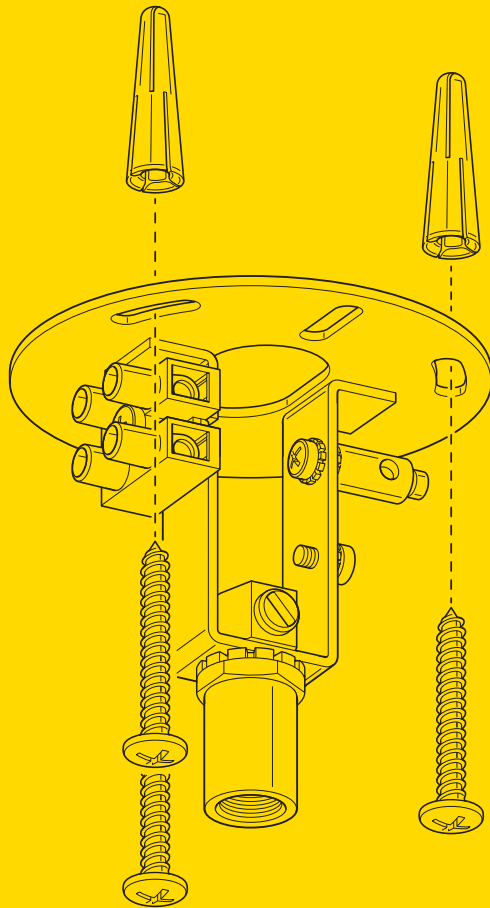


One.

Make earth connection to brass earth terminal and electrical connections to terminal block. Refer to wiring diagram.


Note: Should the 2 metre pendant cable need to be shortened, this must only be done at the ceiling bracket end. Remove cable and cut to desired length, taking terminal wiring into consideration. Ensure cable is secured firmly by the cord grip. Remake electrical connections to terminal block. Ensure all earth connections are made.

L = Brown (Red)
N = Blue (Black)

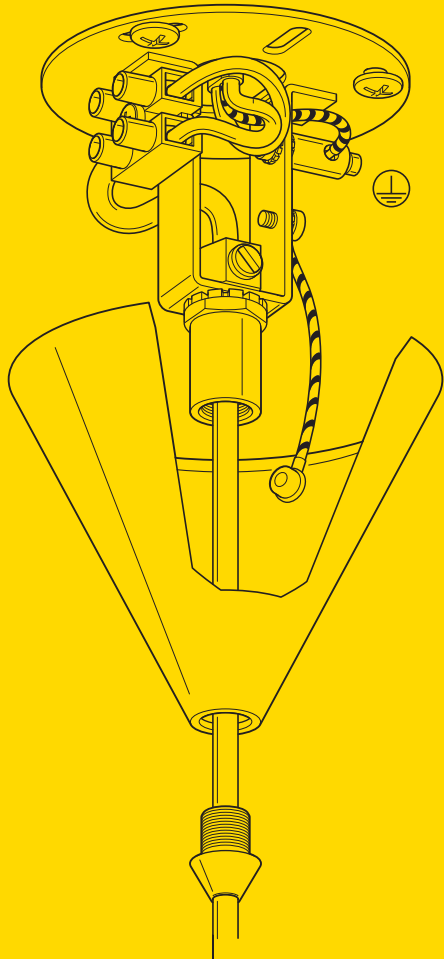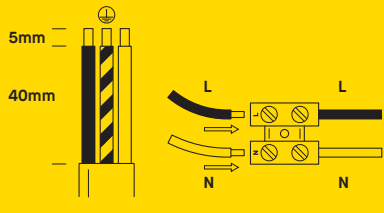


Two.

Push cone cover against ceiling and secure with conical screw.

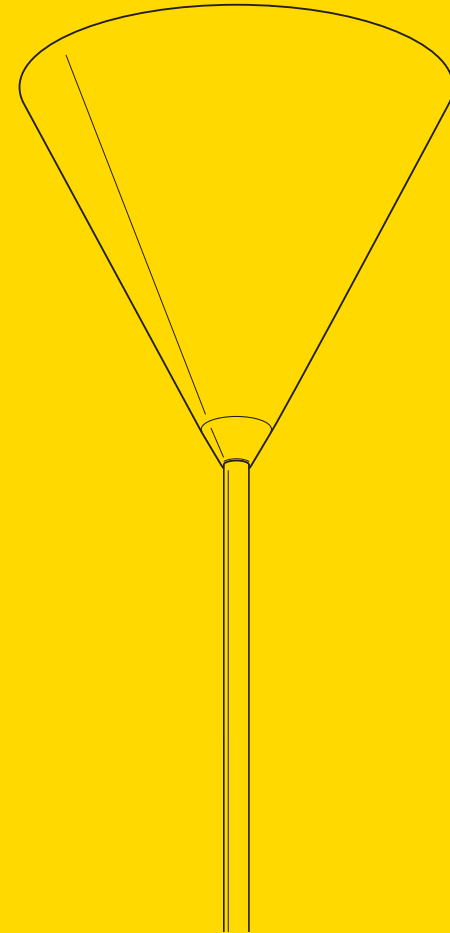


Three.

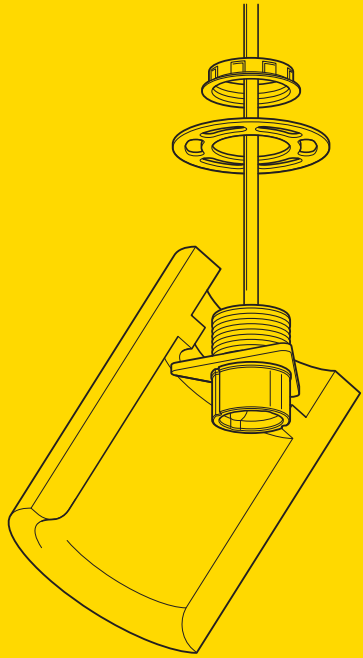


Insert triangular support into shade by tipping at an angle. Raise shade above support to enable easier fitting of the LED lamp. Ensure shade is firmly held when fitting lamp.

Lamp (Bulb):
LED only. 8w Max. GU10

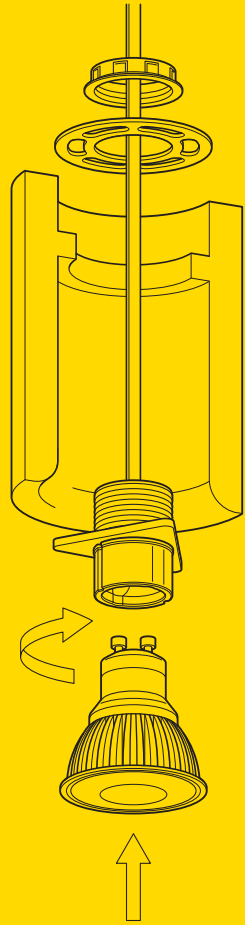

Four.

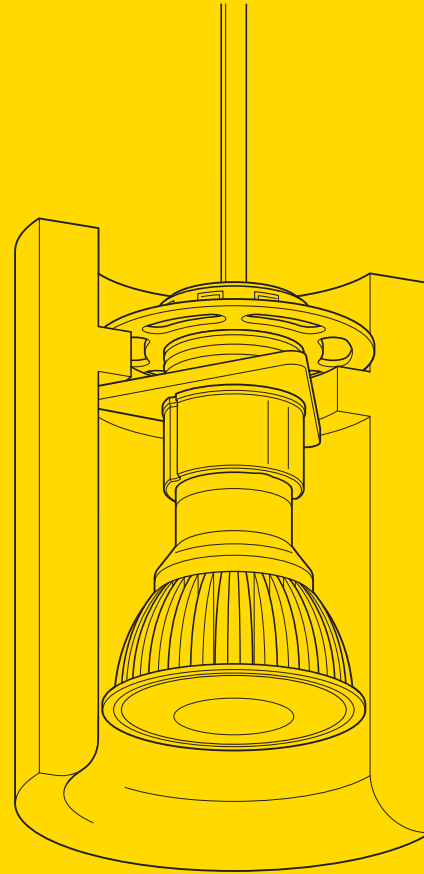

With lamp fitted, ensure shade sits on triangular support.

Fit ventilated disc, and screw on ring nut but do not yet tighten.

Please take the time to adjust position of the support, so that shade hangs perfectly vertical before tightening ring nut to lock in position.

To replace lamp (bulb) firstly turn off power. Allow lamp to cool. Undo ring nut and raise shade. Replace lamp.

Repeat instruction Five as above.

Five.

Six.

Tested and approved by
the Lighting Industry
Association Laboratories
for compliance with
EN-60598 Part 1 and
EN-60598 Part 2-1.

Any modification or
improper installation
releases the manufacturer
from any liability.

Product Description:
⊕ Class 1 product. Must
be connected to earth.

Luminaire is suitable for
mounting on normal
flammable surfaces.
IP20 Luminaire. Indoor
use only.

Supply voltage:
220-240V ~ 50/60Hz
Lampholder: GU10
Lamp Type (Bulb):
LED only. 8w Max.
Pendant Cable:
2 x 0.81² (2 x 20AWG)



Not to be treated as
household waste.
By ensuring that this
product is disposed of
correctly you will help to
protect the environment.

Important: Please retain
this instruction leaflet for
future reference.

Terence Woodgate
West Hill,
Little Trodgers Lane,
Mayfield, East Sussex,
TN20 6PW, England

+44 (0)1435 872677
info@terencewoodgate.com
terencewoodgate.com

**Terence
Woodgate**
